


Figure 85A—Wiring Diagram for AT-17A, AT-17C, and UC-78C  
(12 Volt—Reference Print 54000)

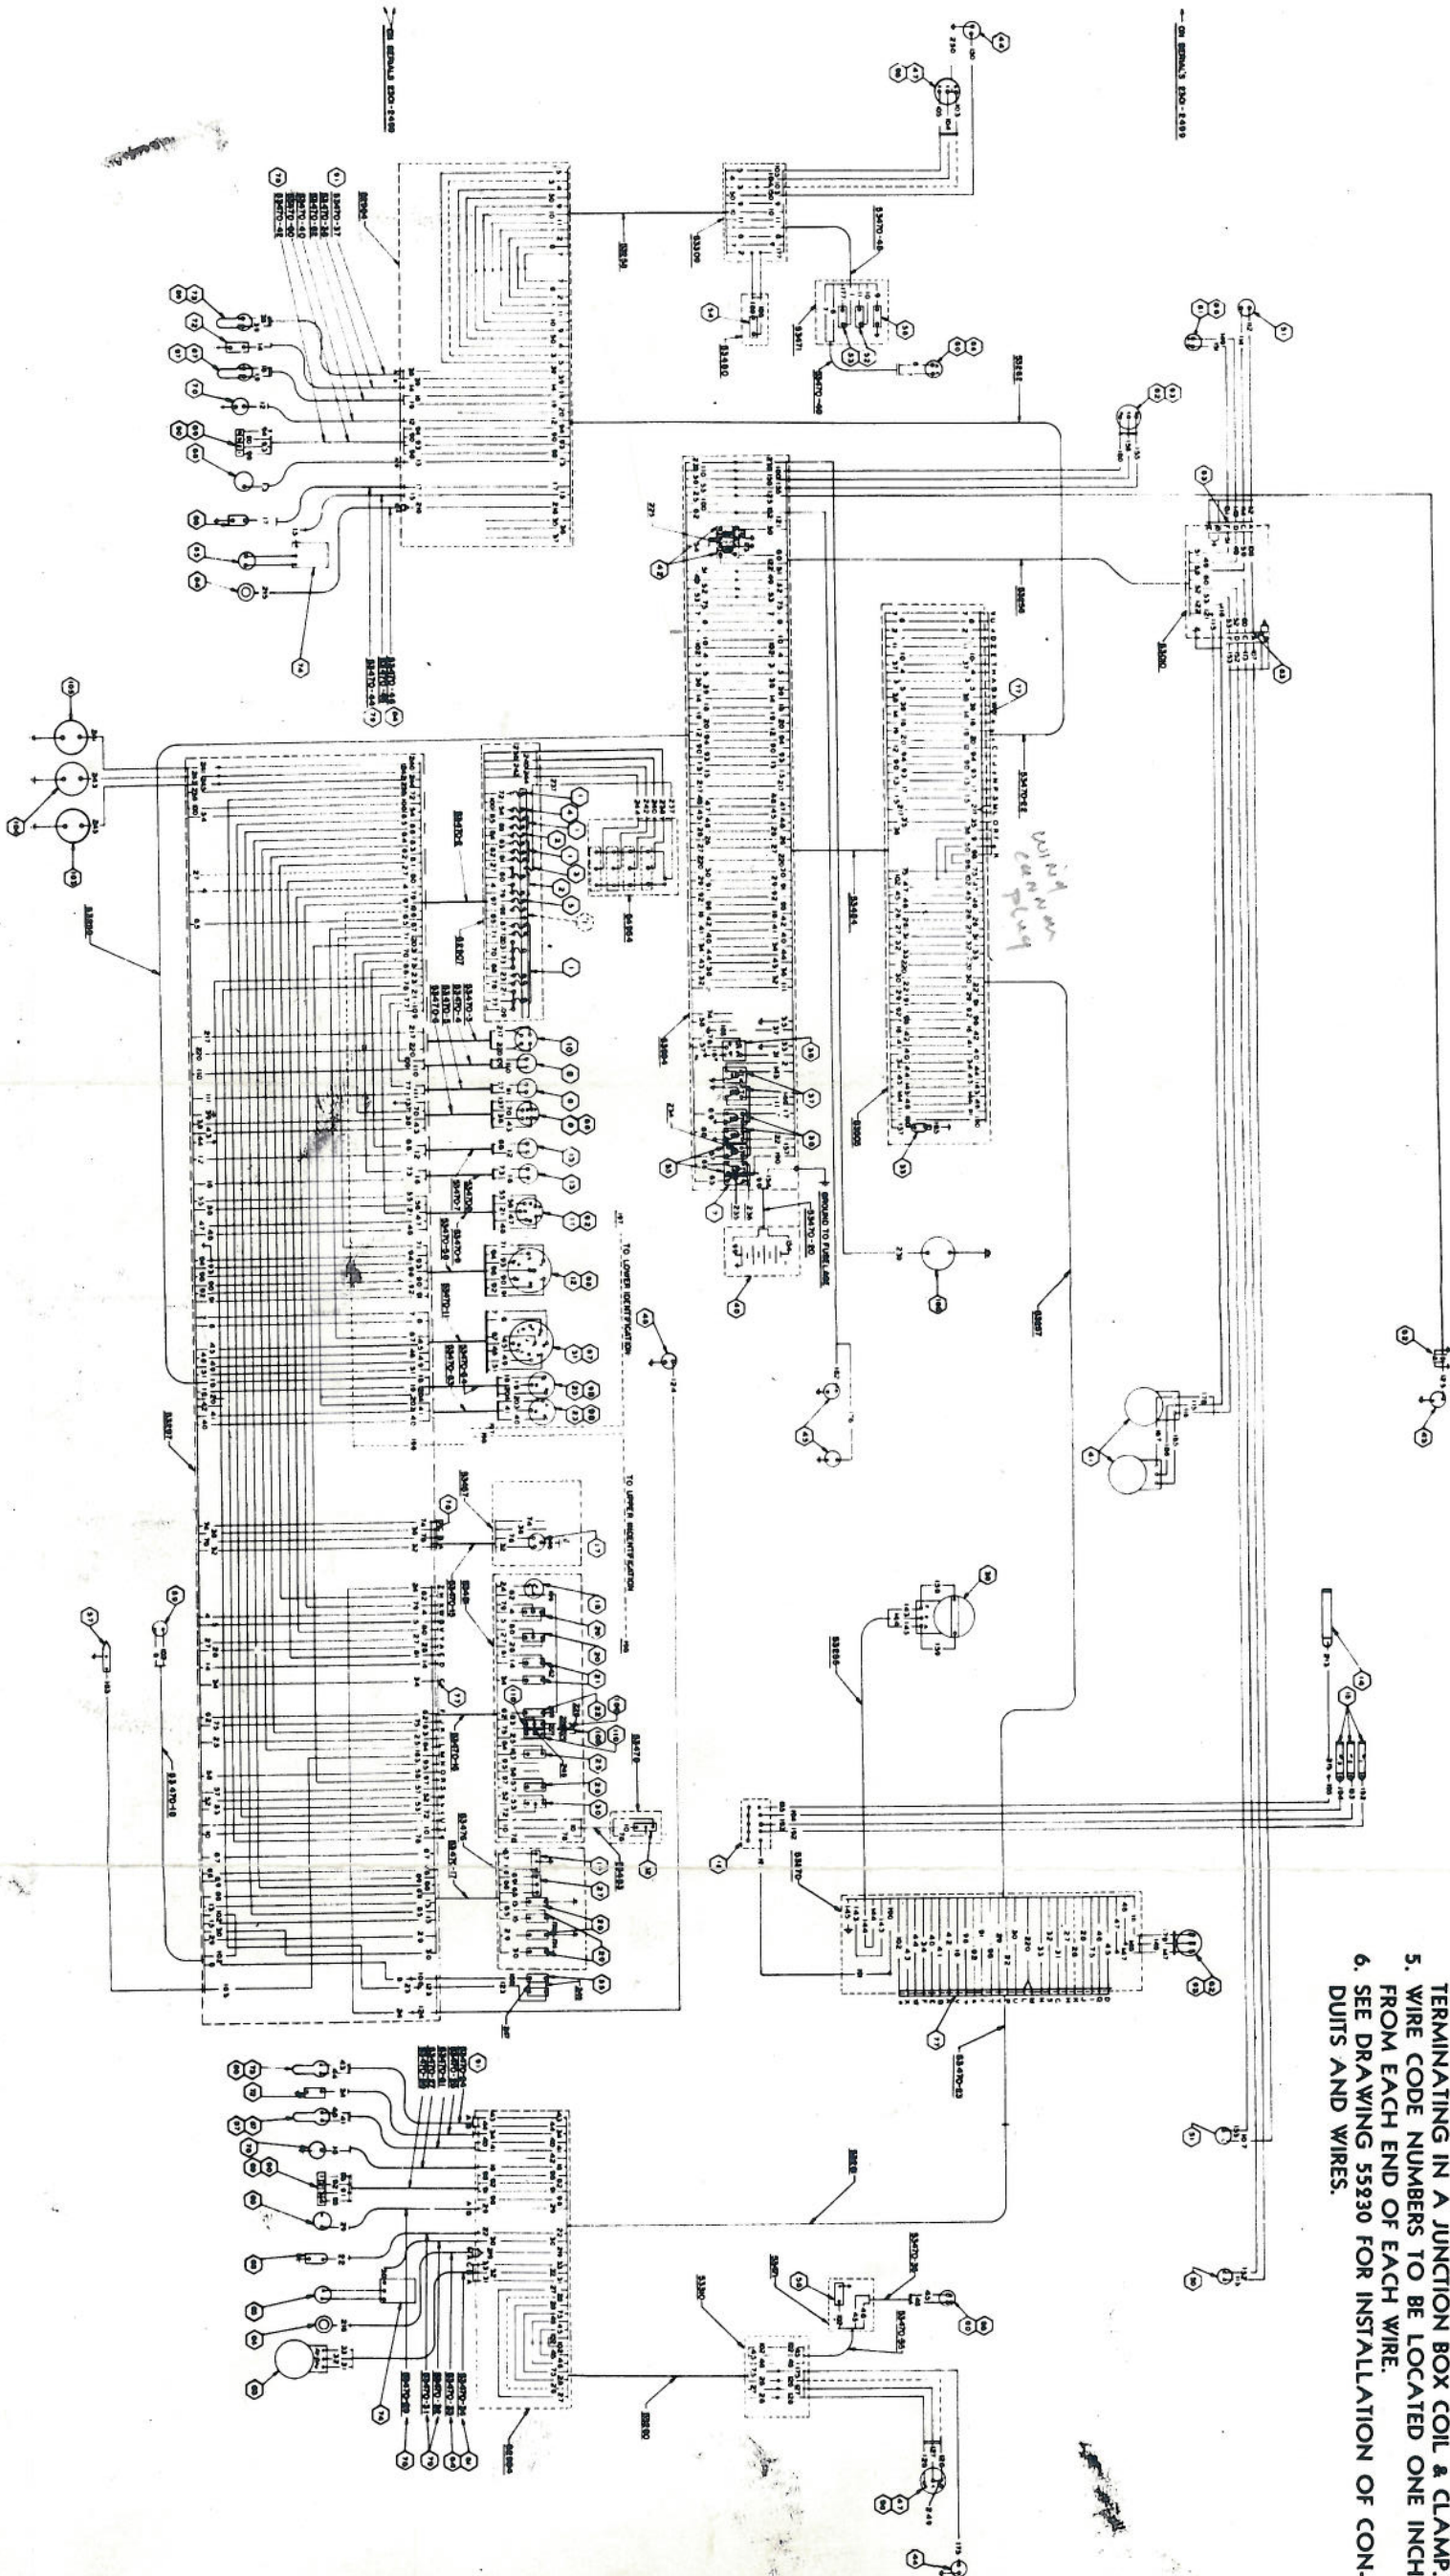

- NOTE
1. GENERATOR WIRES #32, #33, #35, #36 TO BE INSTALLED TWISTED FROM ENGINE TO SOLENOID BOX.
  2. ALL WIRES TO BE ROCKBROS OR EQUIVALENT.
  3. SHIELDED WIRES MUST NOT PASS THROUGH JUNCTION BOXES OR CONDUITS.
  4. ALL LOOSE WIRE ENDS MUST BE TAPED, & WHEN TERMINATING IN A JUNCTION BOX COIL & CLAMP.
  5. WIRE CODE NUMBERS TO BE LOCATED ONE INCH FROM EACH END OF EACH WIRE.
  6. SEE DRAWING 55230 FOR INSTALLATION OF CONDUITS AND WIRES.